

MTIdry Strip™

LS 1550

Ventilation Strips For Siding

al de construcción combustible según se categorizó en el Código Internacional de Construcción de 2018 (artículo 703.5) y debe cumplir los requisitos de instalación y mantenimiento del fabricante de la fachada que apliquen a todos los sistemas de agua y garantizar el rendimiento de DuPont™ Tyvek®. El uso de adhesivos, recubrimientos o limpiadores sobre o dentro del sistema de agua al agua DuPont™ Tyvek®.



Applications

- ✓ Fiber Cement Siding
- ✓ Composite Siding
- ✓ Real Wood Siding

MTIdry Strip™ installed over studs creates an air gap for drainage & ventilation behind siding

An Air Gap Protects You Against Moisture

Create a predictable air gap behind siding & cement board with MTIdry Strip™



MTIdry Strip™ creates a 3/16" air gap

The MTI Advantage

- ✓ Creates Rainscreen Air Gap
- ✓ High Compressive Strength
- ✓ Easy to Install
- ✓ 100% Recycled Content



Bundled in 50' rolls - can be trimmed with a utility knife




February 2025

Detail Drawings • BIM • Free Consultation • Videos
info@mtidry.com 800-879-3348 MTIdry.com

Installation

- Install MTIdry Strip™ over the weather resistive barrier
- Align with top of siding or fastening pattern of siding
- Attach with staples or other mechanical fasteners
- Install exterior siding per manufacturer's specification

Complete Installation at MTIdry.com/installation

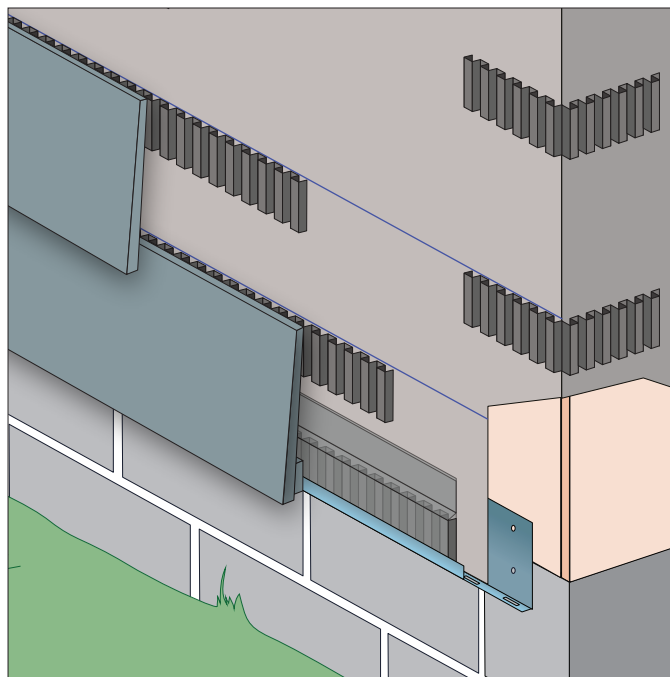

Technical Information

Material Description


High impact polystyrene sheets, 0.024 inch (0.6 mm) thick, formed with corrugations.

UV Exposure


Over 9 weeks in accelerated UV testing (ASTM G 154)

Fungi Resistance

Does not support fungal growth (ASTM C 1338)

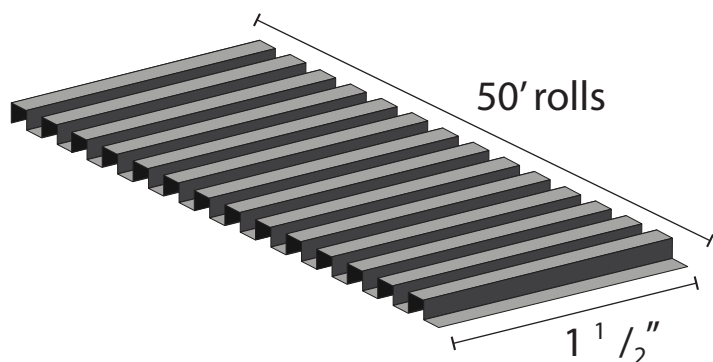

MTIdry Strip™ LS 1550

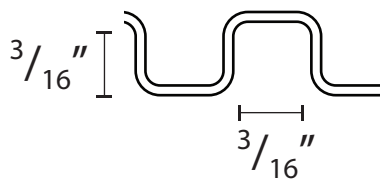

Depth (drainage gap) $\frac{3}{16}$ in (5mm)

Roll 50 ft

Box 1,800 ft

Pallet 36,000 ft

Questions about application, installation or ordering?
MTIdry.com/mtidry-strip



February 2025