



Rainscreen Starter Strip & Bug Screen

Applications

- ✓ Fiber Cement Siding
- ✓ Composit Siding
- ✓ Natural Wood Siding

Time Saving Starter Strip & Bug Screen

Corrugated Lath Starter Strip™ features an adhered fabric that lets water and air through while keeping bugs out. Corrugated Lath Starter Strip™ can be doubled up to replace siding starter strip.



Corrugated Lath Starter Strip™ creates a bug screen at the base of the wall around its $\frac{3}{16}$ " air gap

The MTI Advantage

- ✓ Time Saving Starter Strip
- ✓ Integrated Bug Screen
- ✓ Creates Rainscreen Air Gap
- ✓ High Compressive Strength
- ✓ Easy To Install
- ✓ 100% Recycled Content



Bundled in 25' rolls - can be trimmed with a utility knife

Corrugated Lath Starter Strip™


CLSS 2316



Rainscreen Starter Strip & Bug Screen

Installation

- Install Corrugated Lath Strip™ over the weather resistive barrier.
- Install at terminations to the siding (foundation, window head, eaves) to allow the rainscreen air gap to drain and ventilate.
- Fasten the starter strip over the WRB with mechanical fasteners (staples).
- A second starter strip installed over the first can be used to replace the siding starter strip.

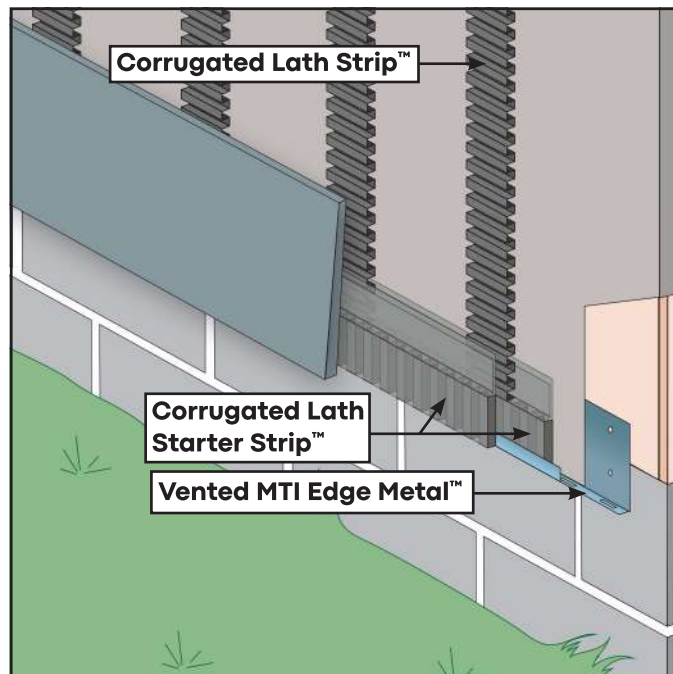

Complete installation guide and installation video can be found at MTIdry.com/installation


Technical Information

Material Description High impact polystyrene sheets, 0.024 inch (0.6 mm) thick, formed with corrugations.

UV Exposure Over 9 weeks in accelerated UV testing (ASTM G 154)

Fungi Resistance Does not support fungal growth (ASTM C 1338)

Corrugated Lath Starter Strip™ (CLSS 2316)

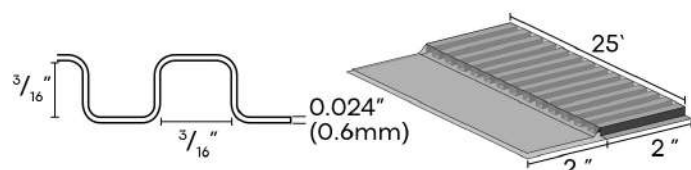

CLSS 2316

Depth (drainage gap)	3/16 in. (5mm)
Roll	25 ft
Box	600 ft / 24 rolls
Pallet	12,000 ft

Questions about application, installation, or ordering?
MTIdry.com/mti-product/corrugated-lath-starter-strip

